





Beam Clamps



Permanently Fixed Adjustable Girder Clamps

- Designed for light industrial applications.
- Ideal for permanent overhead anchor point above machinery or equipment.
- Positive Grip on flange.
- Lightweight one piece adjustable design.
- For use at 0 degrees from vertical.


Model	WLL @ 0° Vertical	Jaw Grip Adjustment inch min.-max	Jaw Aperture inch	Inside Shackle Crown to Spacer (in.)	Average Weight (lbs)	
PFC1	2240	1016	3 - 7-1/2"	7/8"	1-1/2"	4.6
PFC2	4480	6096	3 - 7-1/2"	7/8"	1-1/2"	5.5
PFC3	6720	8128	3 - 7-1/2"	7/8"	1-1/2"	8.5



Fixed Jaw Adjustable Girder Clamps

- One piece adjustable design.
- Used for lifting, pulling or as an anchor point.
- No tools required for mounting/removal.
- Integrated lifting shackle.
- Positive Grip left/right threaded adjusting bar.
- Designed with maximum safe jaw grip adjustment.
- For use at up to 15 degrees from vertical.
- **Approved for Personnel tie-off use.**


Model	WLL @ 0-15° Vertical		Jaw Grip Adjustment inch min.-max	Jaw Aperture (in.)	Inside Shackle Crown to Spacer Inch	Average Weight (lbs)
	Lbs	Kg				
S1	4480	2032	3 - 7-1/2"	7/8"	3-3/4"	9
S2	6720	3048	3 - 7-1/2"	7/8"	3-3/4"	11
S2A	6720	3048	3 - 7-1/2"	7/8"	3-3/4"	18
S3	8960	4064	6-10"	7/8"	3-7/8"	24
S3X	11200	5080	3 - 7-1/2"	7/8"	4-1/8"	22
S3A	11200	5080	6-12"	1-5/8"	4-1/8"	33
S4S	13440	6096	8-18"	1-5/8"	4-1/8"	41
S4A	22400	10160	8-18"	1-5/8"	4-1/2"	62
S12	33601	15241	8-18"	2"	5-7/8"	109
S14	33601	15241	16-24"	2-1/2"	5-7/8"	129



Swivel Jaw Adjustable Girder Clamps

- One piece adjustable design.
- Used for lifting, pulling an anchor point.
- Added benefit of horizontal jaw adjustment.
- Full length/width of swivel jaw anchors on flange Integrated lifting shackle .
- Positive Grip left/right threaded adjusting bar.
- For use at up to 15 degrees from vertical.
- **Approved for Personnel tie-off use.**


Model	WLL @ 0-15° Vertical		Jaw Grip adjustment inch min.-max	Jaw Aperture (in.)	Inside Shackle Crown to Spacer Inch	Average Weight (lbs)
	Lbs	Kg				
S5	6720	3048	3-1/2 - 12"	1"	3-3/4"	22
S5A	6720	3048	3-1/2 - 12"	1"	4-1/2"	31
S6	11200	5080	3-1/2 - 12"	1"	4-1/2"	31
S6A	11200	5080	3-1/2 - 12"	1"	4-1/2"	34
S11	22400	10160	3-1/2 - 12"	1"	4-1/2"	47



Fixed Jaw Adjustable Girder Dog

- One piece adjustable design.
- Used for lifting, pulling as an anchor point.
- Enhanced by balanced distribution of side points.
- Maximum grip & hold and safety.
- No tools required.
- Positive Grip left/right threaded adjusting bar.
- For use at up to 15 degrees from vertical.
- **Approved for Personnel tie-off use.**


Model	WLL @ 0-15° Vertical		Jaw Grip Adjustment inch min.-max	Jaw Aperture (in.)	Inside Shackle Crown to Spacer inch	Inside Shackle Width (in.)	Average Weight (lbs)
	Lbs	Kg					
S15	44800	20320	8-18"	2"	8-1/8"	4-9/16"	144
S16	44800	20320	16-24"	2-1/2"	8-1/8"	4-9/16"	170
S17	56000	25400	8-18"	2"	8-1/8"	5-1/8"	166
S18	56000	25400	16-24"	2-1/2"	8-1/8"	5-1/8"	198
S19	67200	30480	8-18"	2-1/2"	8-1/8"	5-1/8"	203
S20	67200	30480	16-24"	3"	8-1/8"	5-1/8"	236

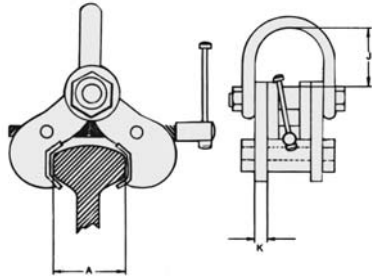

Adjustable Universal Rail Lifting Clamp

- Designed to grip on all standard AREA Rail & Crane Rail.
- Positive Grip through left/right threaded adjusting bar.
- Lightweight & versatile adjustability.
- No tools required.
- Integrated lifting shackle.
- Ideal for construction, erection and maintenance.


Model	WLL @ 0° Vertical		Jaw Grip Adjustment	Inside Shackle Crown to Spacer inch	Average Weight (lbs)
	Lbs	Kg			
R1	6720	3048	STD AREA Rail & Crane Rail	3-3/8"	13
R2	11200	5080		4-1/4"	21

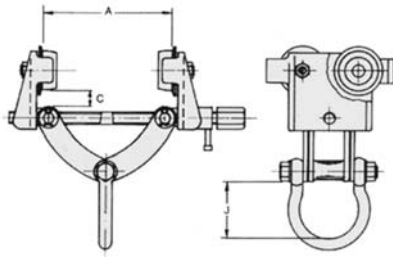

Adjustable Runway Beam Trolleys with Anti-Drop Plates

- Lightweight hand push, easy to use ball bearing wheels.
- Developed for lighter industrial applications.
- Adapts to beam width by turning left and right hand adjusting bar.
- Fitted with width adjustment locking mechanism.
- Wheel guarding anti-drop plates.
- No additional width adjusting tools required.
- Positive Grip Clamps.
- **Approval for personnel tie-off use***


Model	WLL @ 0° Vertical		Width Adjustment inch min.-max	To Accommodate Beam Flange Thickness (max) (in.)	Inside Shackle Crown to Spacer inch	Average Weight (lbs)
	Lbs	Kg				
BA1	2240	1016	2-1/2"-8"	1"	4"	14
BA2	3360	1524	3"-8"	1"	4"	15
BA3	4480	2032	3"-8"	1"	4"	15



Adjustable Runway Beam Trolley with Anti-Drop Plates

- One piece adjustable design.
- Hand push, easy to use, ball bearing wheels.
- Adapts to beam width by turning left/right hand threaded adjusting screw.
- Includes locking collar and wheel guard anti-drop plates for maximum safety.
- Integrated lifting shackle.
- No tools required.
- Ideal for temporary and permanent installations requiring speedy installation and use.
- **Approval for personnel tie-off use***

Model	WLL @ 0° Vertical		Width Adjustment Inch Min-Max	To Accommodate Beam Flange Thickness (max) (in.)	Inside Shackle Width (in.)	Average Weight (lbs)
	Lbs	Kg				
B1	6720	3048	3"-8"	1"-1/8"	4-3/4"	50
B2	13440	6096	4"-12"	1"-1/4"	3-7/8"	113
B3	22400	10160	1"-1/2"	1"-1/2"	5 1/8"	158.7



Geared Runway Beam Trolley with Anti-Drop Plates

- One piece adjustable design.
- Hand geared for easy movement of heavy loads.
- Ball bearing wheel movement.
- Integrated lifting shackle.
- Adapts to beam width by turning left/right hand threaded adjusting screw.
- Includes locking collar and wheel guard anti-drop plates for maximum safety.
- Ideal for temporary and permanent installations requiring speedy installation and use.
- **Approval for personnel tie-off use***

Model	WLL @ 0° Vertical		Width Adj. Inch Min-Max	To Accommodate Beam Flange Thickness (max) inch	Inside Shackle Width (in.)	Average Weight (lbs)
	Lbs	Kg				
GBT1	6720	3048	3"-8"	1 1/8"	4"	68
GBT2	13440	6096	4"-12"	1 1/4"	4"	127
GBT3	22400	10160	4"-12"	1 1/2"	5 1/8"	183
GBT4	33600	20320	8"-18"	3"	8"	354
GBT5	44800	20363	8"-18"	3"	8 3/4"	440

HOISTS & WINCHES