



Roebing Clamp


The **Roebing Clamp** utilizes spiral ridges on one side of the groove to resist slippage. Properly applied, the clamp will allow two parallel ropes to share the load during shortening or tensioning applications. The clamps are designed for either 1/2" or 5/8" diameter ropes. When the included bolts are torqued to 50 ft-lbs the clamp maintains a maximum safe working load of 600 lb per rope.



Cable Bands

Cable Bands are made of pliable material indented with a groove and lock seam at one edge. Application of the band is simple, requires no special tools, and may be made in seconds with an ordinary pair of pliers.

Cable Bands are packaged 50 per box and are designed to fit a particular diameter of rope from 3/16" to 1-1/2".

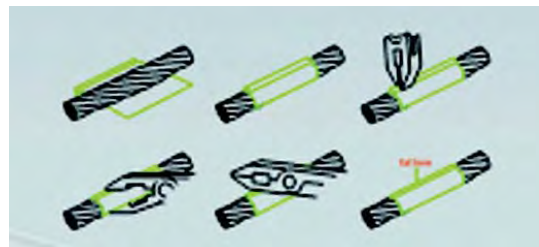

Shackle Tie Kits

Shackle Tie Kits are used to minimize the rotation of elevator rope wedge sockets under load. Once equal tension has been established, the shackles need to be secured to prevent rotation during the operation of the elevator. A short length of wire rope is laced through the shackles and the ends are joined using wire rope clips. (Local elevator codes vary as to the diameter of the wire rope required.)

The Shackle Tie Kit contains a short length of wire rope and two (2) wire rope clips.

