



Spreader Bars

Model BEF - Spreader Bar End Fittings



PRODUCT FEATURES:

- Build your own spreader beam.
- Designed to work with a range of shackle sizes, both top and bottom.
- Complies with ASME standards when assembled to specifications using designated pipe and rigging.

Specifications

Model Number	Max. Capacity (tons)*	Schedule 80 Pipe Size	Weight (lbs) Per Pair
BEF-2-1/2	7.5	2-1/2"	16
BEF-5	17	5"	46
BEF-8	39	8"	266

NOTE: System capacity is determined by span, rigging and hardware, consult factory for complete details.

Model HC-BEF - High Capacity Beam End Fitting



PRODUCT FEATURES:

- Build your own spreader beam.
- Pivoting lower lugs allow for 75 degrees to 90 degrees lower rigging angle.
- Complies with ASME standards when assembled to specifications using designated pipe and rigging.

Specifications



Model Number	Max. Capacity (tons)*	Schedule 80 Pipe Size	Weight (lbs) Per Pair
BEF-5HC-25	25	5"	284
BEF-5HC-50	50	5"	333
BEF-8HC-50	50	8"	440
BEF-8HC-80	80	8"	60
BEF-12HC-80	80	12"	840
BEF-12HC-110	110	12"	992
BEF-12HC-130	130	12"	1010

NOTE: System capacity is determined by span, rigging and hardware, consult factory for complete details.

Model BEF-PC - Beam End Fitting - Pipe Coupler



PRODUCT FEATURES:

- Add flexibility to your spreader beam end fitting system.
- Securely joins two pipe lengths to create a longer spreader beam.
- Innovative design reduces sag in the spread system once assembled.
- Includes all connecting pin or bolts.
- Complies with ASME standards when assembled to specifications using designated pipe and rigging.



Specifications

Model Number	Use With Model	Used With Pipe (in.)*	Weight (lbs)
BEF-PC-2-5	BEF-2-1/2	2-1/2 SCH. 40	14
BEF-PC-5	BEF-5	5-SCH. 40	60
BEF-PC-5HC	BEF-5HC	5 SCH. 80	114
BEF-PC-8	BEF-8	8 SCH. 40	125
BEF-PC-8HC	BEF-8HC	8 SCH. 80	175
BEF-PC-12HC	BEF-12HC	12 SCH. 80	335


* See end fitting assembly instruction for complete pipe specifications.



Model 30 - Fixed Spreader Beams

PRODUCT FEATURES:

- Ideal where headroom is not limited.
- Adds stability to lift.
- Available with standard chain or wire rope rigging.
- Available with Adjust-A-Leg rigging for off center load adjustment (minimum lifting capacity will be approximately 10-15% of beam rating).
- Wide range of additional sizes and capacities available.
- Complies with ASME Standards.



• Shown w/Standard Chain - Other Top Rigging options not available on QuickShip Program.


2	CAT.	30-2-4	30-2-6	30-2-8	30-2-10	30-2-12	30-2-16	30-2-20	30-2-24	A=1/2 F=4-1/4 B=2-1/2 O=31/32 C=5
	H.R.	34	46	58	70	82	106	132	156	
	WGT.	45	60	82	95	115	225	408	445	
5	CAT.	30-5-4	30-5-6	30-5-8	30-5-10	30-5-12	30-5-16	30-5-20	30-5-24	A = 1 F = 6 B = 3-1/2 O = 1-1/6 C = 7
	H.R.	37	49	61	73	83	110	134	158	
	WGT.	62	78	100	117	168	305	435	661	
10	CAT.	30-10-4	30-10-6	30-10-8	30-10-10	30-10-12	30-10-16	30-10-20	30-10-24	A = 1-1/4 F = 8-1/8 B = 4-3/8 O = 1-1/2 C = 8-3/4
	H.R.	41	53	64	77	86	113	138	163	
	WGT.	100	122	156	180	240	380	532	915	
15	CAT.	30-15-4	30-15-6	30-15-8	30-15-10	30-15-12	30-15-16	30-15-20	30-15-24	A = 1-1/2 F = 9-1/4 B = 5-1/4 O = 1-3/4 C = 10-1/2
	H.R.	43	55	65	80	92	116	140	167	
	WGT.	126	155	185	242	270	420	665	953	
20	CAT.	30-20-4	30-20-6	30-20-8	30-20-10	30-20-12	30-20-16	30-20-20	30-20-24	A = 1-3/4 F = 9-1/4 B = 6 O = 2 C = 12
	H.R.	46	58	69	82	94	118	140	170	
	WGT.	170	200	233	315	350	540	775	1341	
30	CAT.		30-30-6	30-30-8	30-30-10	30-30-12	30-30-16	30-30-20		A = 1-3/4 F = 9-3/4 B = 6 O = 2 C = 12
	H.R.		60	70	83	95	120	145		
	WGT.		285	402	440	530	888	1390		
40	CAT.		30-40-6	30-40-8	30-40-10	30-40-12	30-40-16			A = 2 F = 13 B = 7 O = 2-3/4 C = 14
	H.R.		65	77	89	102	127			
	WGT.		563	695	781	1058	1364			

Note: Weight=Beam and hooks only - (no top rigging).

BELOW THE HOOK

Pallet Lifters

Model 90 Pallet Lifter

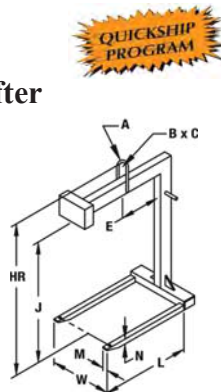

PRODUCT FEATURES:

- Converts overhead crane to lift truck.
- Counter balanced to hang level.
- Maintenance free.
- Allow for ease of loading/unloading in not easily accessible areas.
- Complies with ASME Standards.

Catalog Number	Capacity (tons)	Dimensions (in.)										Weight (lbs)
		Forks			W	E	Bail			J	HR	
		L	M	H			A	B	C			
90-1-36	1	36	2	2	25	18	1	6	5	48	57-1/2	292
90-1-42	1	42	2	2	25	21	1	6	5	48	57-1/2	310
90-1-48	1	48	2	2	25	24	1	6	5	48	58-1/2	371
90-1 1/2-36	1-1/2	36	3	2	25	18	1	6	5	48	58-1/2	388
90-1 1/2-42	1-1/2	42	3	2	25	21	1	6	5	48	58-1/2	432
90-1 1/2-48	1-1/2	48	3	2	25	24	1	6	5	48	58-1/2	459
90-2-36	2	36	3	2	25	18	1	6	5	48	59-1/2	448
90-2-42	2	42	4	2	25	21	1	6	5	48	59-1/2	536
90-2-48	2	48	4	2	25	24	1	6	5	48	59-1/2	627
90-3-42	3	42	4-1/2	2-1/2	25	21	1-1/2	6-1/8	7	48	61-1/2	766
90-3-48	3	48	4-1/2	2-1/2	27	24	1-1/2	6-1/8	7	48	61-1/2	823
90-3-54	3	54	4-1/2	2-1/2	30	27	1-1/2	6-1/8	7	48	61-1/2	969
90-4-48	4	48	5	3	27	24	1-1/2	6-1/8	7	48	63-1/2	1176
90-4-60	4	60	5	3	30	30	1-1/2	6-1/8	7	60	75-1/2	1393
90-5-48	5	48	5	3	30	24	1-1/2	6-1/8	7	48	63-1/2	1193
90-5-60	5	60	4-1/2	2-1/2	38	30	1-1/2	6-1/8	7	60	75-1/2	1403