




Manual Cable Cutter

The **TS-20 Handheld Hydraulic Cable Cutter** is portable, lightweight, and designed to perform for years in the toughest field conditions. This cutter can be used in many applications. However, do not use for telephone & lead sheathed cable, chain, or EHS grade Guy Wire.

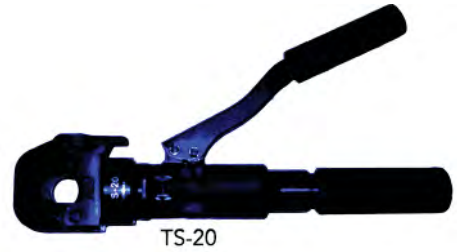

TS-20 Handheld Hydraulic Cutter

Output	Weight	Length	Jaw Opg.	Wire Rope	Soft Stl Bolts	Rebar, Ground & Anchor Rod	ACSR	Cu & Al Wire	Std. Guy Wire
4.4 tons	5.75 lb	14"	.75"	3/4" (20 mm)	11/16" (17 mm)	1/2" (13 mm)	3/4" (20 mm)	3/4" (20 mm)	1/2" (14 mm)

Impact Cable Cutter

Actuated by striking with a hammer, these portable **Impact Cable Cutters** are simple to operate and do a superior cutting job with just a few blows. They are precision engineered to deliver a cut without affecting the original roundness of the rope. The blades and dies are made of heat-treated tool steel ground to close tolerances. A firm base is required for operation of the cutter.

ALWAYS WEAR SAFETY GOGGLES AND FOLLOW ALL SAFETY INSTRUCTIONS WHEN OPERATING THE IMPACT CABLE CUTTER.



Model	Capacity	Height	Base	Weight
1	5/8"	6"	3-1/2"	7 lb
1A	1-1/16"	7"	6-1/4"	15 lb
2	1-1/2"	9"	7-3/4"	28 lb

Hydraulic Cable Cutter

The **Pell Hydrashear Hydraulic Cable Cutter** is a self-contained hydraulic cable cutter designed to give a clean cut with minimum effort. Just pump the handle... no outside power required.

The blades and dies are made of heat-treated tool steel ground to close tolerances. This means a long life for the blades and provides superior performance.

Hydraulic cutters are available in three sizes and capacities

- Model W-075 has a 3/4" capacity
- Model P-1125 has a 1-1/8" capacity
- Model C-1750 has a 1-3/4" capacity





Klein Parallel-Jaw Grip

The **1671-10 Parallel-Jaw Grip** has:

- Longer jaws to achieve a firm hold, reducing the possibility of slippage and damage to the cable
- A design which includes a latch, plus a large diameter eye to accommodate large hooks on hoists, winches, and tackle blocks
- A latch, when closed, that helps maintain cable position in the grip jaws



1671-10

P/N	Min. Diameter	Max. Diameter	Max. Safe Load	Jaw Type	Jaw Length	Approx. Weight
1686-10	0.20" (5.08 mm)	0.40" (10.16 mm)	10,000 lb (4545 kg)	Smooth	4-3/8" (111 mm)	5 lb (2.27 kg)
1686-20	0.20" (5.08 mm)	0.40" (10.16 mm)	10,000 lb (4545 kg)	Knurled	4-3/8" (111 mm)	5 lb (2.27 kg)
1671-10	0.37" (9.40 mm)	0.75" (19.05 mm)	10,000 lb (4545 kg)	Smooth	4-3/8" (111 mm)	5 lb (2.27 kg)
1672-10	0.37" (9.40 mm)	0.75" (19.05 mm)	10,000 lb (4545 kg)	Knurled	4-3/8" (111 mm)	5 lb (2.27 kg)

Tractel Wire Rope Gripper

The **Tractel Wire Rope Gripper** with a self-gripping jaw will hold a wire rope at any point along its length or take up the tension while fixing or adjusting the slack end.

- Light alloy body
- Complete with shackle for anchoring
- Spring-operated jaw for automatic gripping
- Breech loading



Model	Range of Wire Rope in (mm)	Weight lb (kg)	Capacity lb (kg)	Breaking Load lb (kg)
G2	3/32"-5/16" (2-8 mm)	.64 lb (.28 kg)	900 lb (400 kg)	3,500 lb (1,600 kg)
G3	5/16"-9/16" (7-15 mm)	1.25 lb (.56 kg)	1,300 lb (600 kg)	4,100 lb (1,900 kg)
G4	9/16"-11/16" (14-18 mm)	1.3 lb (.59 kg)	1,750 lb (800 kg)	4,400 lb (2,000 kg)

Tractel Coni-Klam Wire Rope Gripper

The **Coni-Klam Wire Rope Gripper** is held by a pair of slightly serrated jaws providing a positive lock by a self-gripping wedge.

- Manufactured in forged steel
- Breech loading
- Immediate adjustment to the required positions
- Does not damage the rope
- High safety factor



Model	Range of Wire Rope in (mm)	Capacity lb (kg)	Weight w/o Shackle lb (kg)	Weight w/ Shackle lb (kg)
EC10	3/16"-3/8" (5-10 mm)	2,200 lb (1,000 kg)	2.6 lb (1.2 kg)	3.5 lb (1.6 kg)
EC14	7/16"-9/16" (10.5-14mm)	4,400 lb (2,000 kg)	5.7 lb (2.6 kg)	3.7 lb (8.1 kg)
EC21	5/8"-13/16" (15-21 mm)	6,600 lb (3,000 kg)	11.9 lb (5.4 kg)	7.5 lb (16.5 kg)